

Link do produktu: <https://sklep.akcesoria-cnc.pl/serwo-100w-24v-1000-rpm-0-96nm-32768ppr-p-62.html>



SERWO 100W 24V 1000 rpm 0,96Nm 32768ppr

Cena brutto	659,00 zł
Cena netto	535,77 zł
Dostępność	Dostępny
Czas wysyłki	24 godziny
Kod producenta	57D2R1010-SJ0
Kod producenta	57D2
Marka	Brilliant Technology
Model	57D2R1010
Moc	0.1 kW
Typ silnika	trójfazowy
Rodzaj silnika	elektryczny
Średnica wału	8 mm
Obroty znamionowe pod obciążeniem	1000 RPM

Opis produktu

SERWO AC 100W Z ENKODEREM ABSOLUTNYM 32768p.

Z ZINTEGROWANYM STEROWNIKIEM

PARAMETRY


- **STEROWANIE STEP - DIR (KROK - KIERUNEK)**
- **MOŻLIWOŚĆ PARAMETRYZACJI POPRZEC RS-232 - DOSTĘPNY PROGRAM GRATIS**
- MOC 100W
- NAPIĘCIE ZASILANIA 24VDC
- PRĄD 4,4 A
- OBROTY ZNAMIONOWE 1000RPM
- MOMENT ZNAMIONOWY 0,96Nm
- MOMENT CHWILOWY 3Nm
- **ENKODER ABSOLUTNY 32768P**
- IP54
- PRACA W KLASIE S1
- CHARAKTER PRACY STEROWNIKA - WEKTOROWY
- STAŁY MOMENT OBROTOWY OD NAJNIŻSZYCH PRĘDKOŚCI 1-1000 OBROTÓW/MIN
- ROZMIAR KOŁNIERZA NEMA23 (57X57mm)
- możliwość współpracy z każdą przekładnią planetarną NEMA23, umożliwiającą uzyskanie obrotów nawet do 1 / 60min
- -----
- bezproblemowość użytkowania
- banalna instalacja,
- stosunkowo duża moc i wysoki moment obrotowy w całej dostępnej prędkości od 10-1400rpm


-
- możliwość parametryzacji napędu za pomocą oprogramowania na PC i interfejsu - GRATIS
 - możliwość podziału impulsów w szerokim zakresie

Wymienione możliwości i parametry napędu zachęcają do półprofesjonalnych i profesjonalnych zastosowań.


Rewelacyjny do napędu drukarek 3d, niewielkich ploterów, grawerek laserowych, napędu do etykiciarek i wielu innych urządzeń.



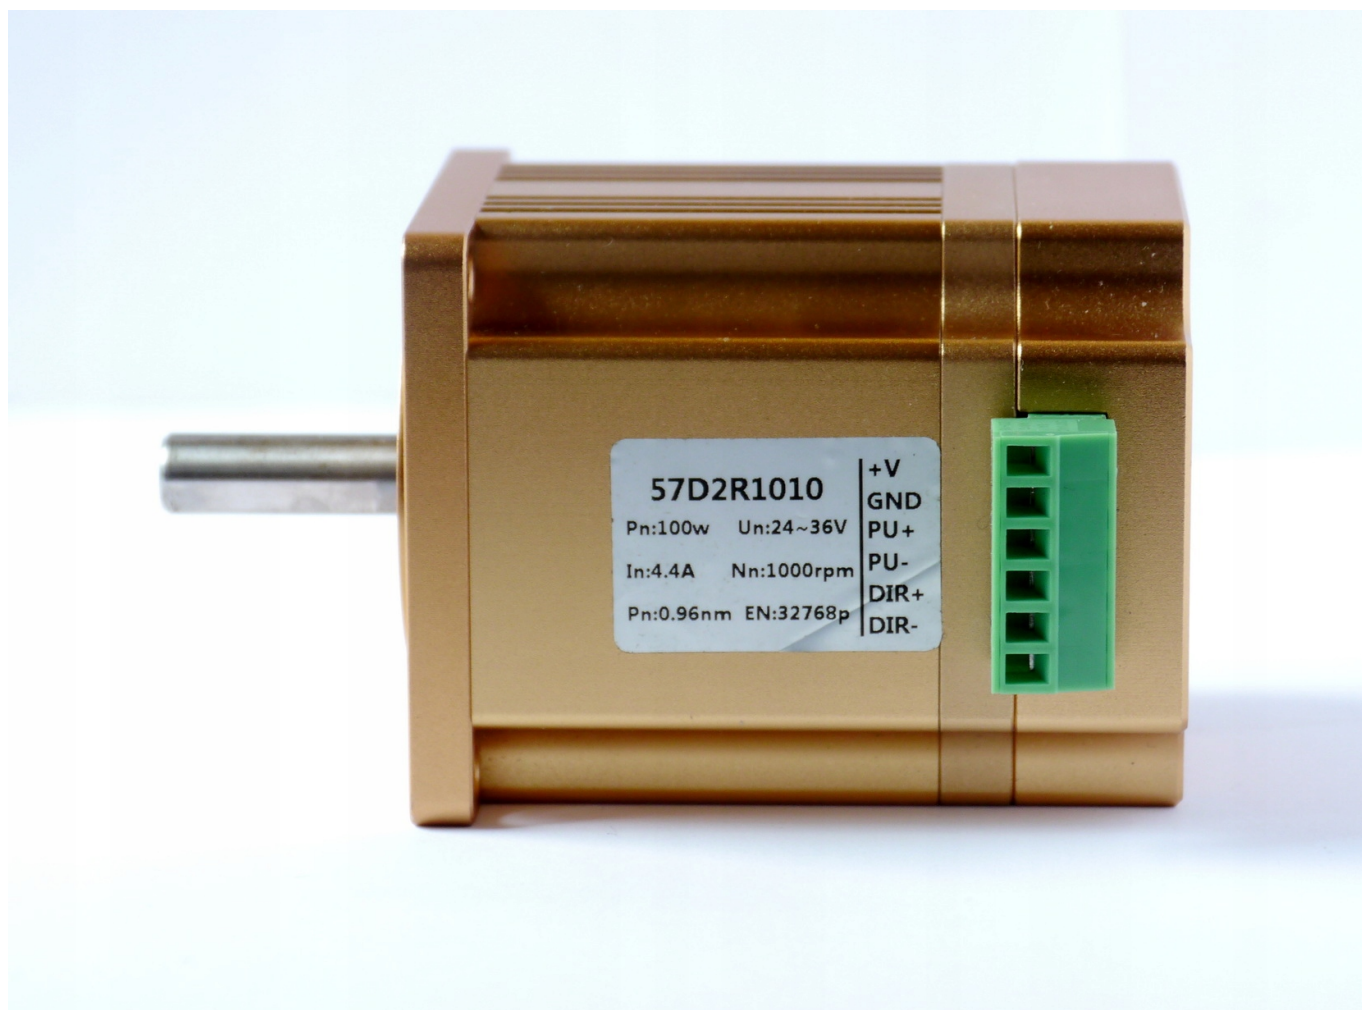

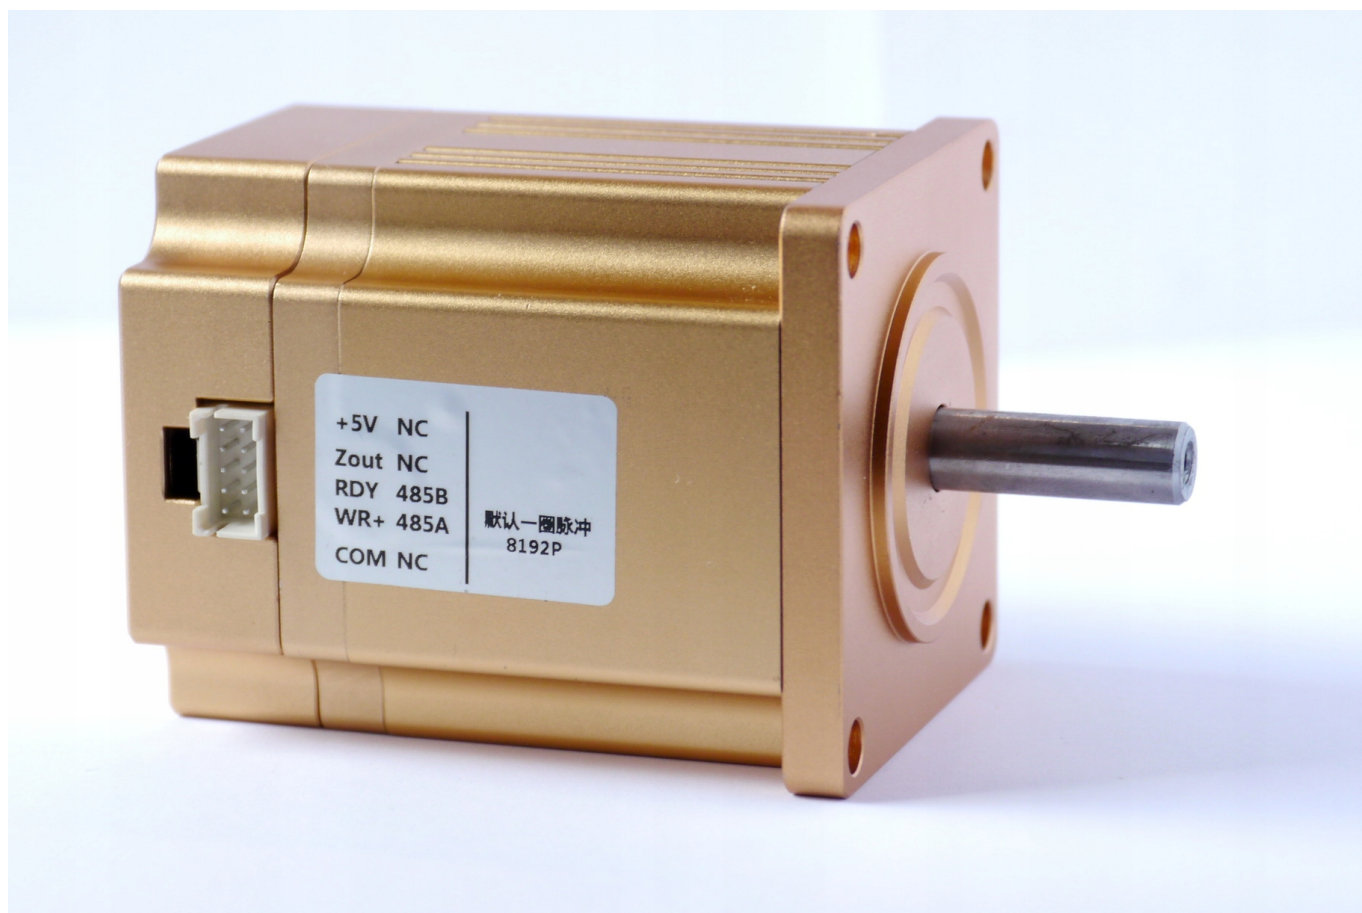

WYMIARY NAPĘDU

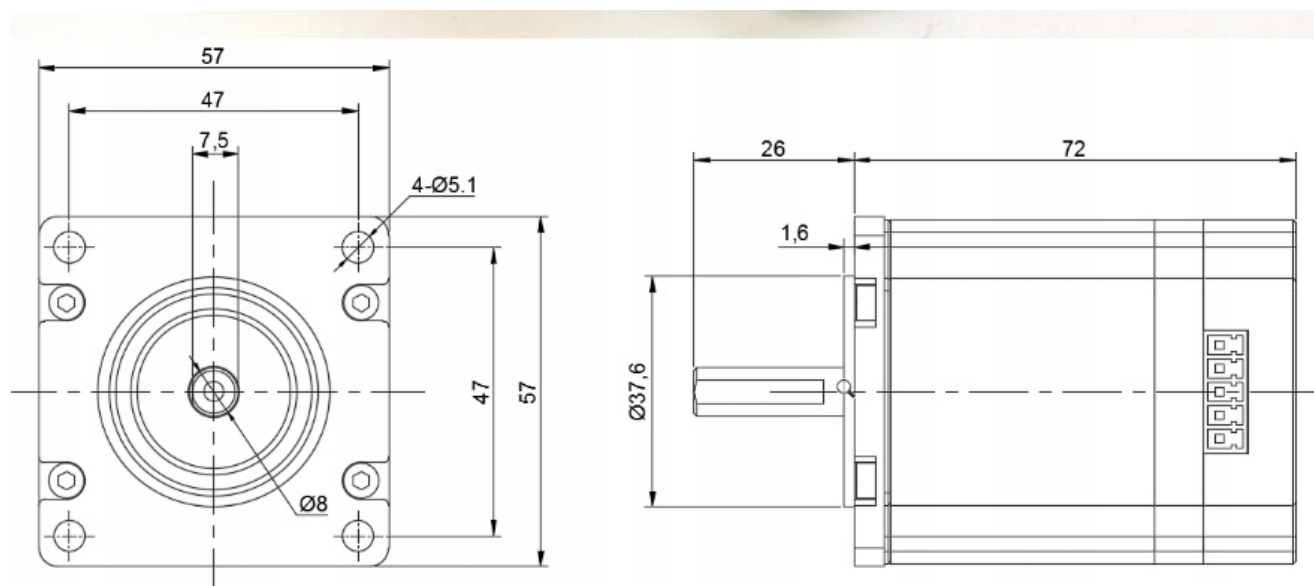

Driver specification:

(1)Power and control signal interface

Terminal serial number	name	function
1	+24V	Positive pole of dc power supply, +24V.Positive and negative connection will directly short circuit the power supply, may also damage the driver
2	GND	Direct current source.Positive and negative connection will directly short circuit the power supply, may also damage the driver
3	PU+ (+5V)	Pulse control signal: the pulse rising edge is effective;PU- normally 3.3 ~ 5V at high voltage and 0 ~ 0.5v at low voltage. To reliably respond to pulse signals, the pulse width should be greater than 1.2 microns.Series resistance is required if +12V or +24V is used.
4	PU- (PU)	
5	DIR+ (+5V)	Direction signal: high/low level signal. In order to ensure reliable commutation of motor, direction signal should precede pulse signal At least five microns are established.DIR- 4 ~ 5V at high voltage and 0 ~ 0.5v at low voltage.
6	DIR- (DIR)	

PARAMETRY

Product Description

Packaging & Shipping

Company Information

Model number

57B2K1010-330

power supply	voltage	24VDC±10%
	electric current	4.4A
electric machine parameter	torque	0.96NM
	rated speed	1000RPM
	maximum speed	1500RPM
	power	100W
return signal		Single coil 15-bit magnetoelectric encoder (single coil 32768 pulse)
Cooling mod		natural cooling
weight		0.56KG
Position control mode	Maximum input pulse frequency	500KHz
	Pulse command mod	pulse+direction, A+B
	Pulse command mod	The set range1~65535 1~65535

	Position sampling frequency	2KHz
defensive function		Locked-rotor alarm
defensive function		RS485(modbusRTU 19200,8,N,1)
service environment	environment temperature	0~40°
	work under the allowed highesttemperature	85°
	humidity	5~95%