Dane aktualne na dzień: 07-11-2026 09:59

Link do produktu: https://sklep.akcesoria-cnc.pl/zintegrowany-serwo-naped-60sei113-400w-48v-1-27nm-step-dir-p-192.html



Zintegrowany serwo napęd 60SEI113 400W 48V 1,27Nm step-dir

Cena brutto	**1 499,00 zł**
Cena netto	**1 218,70 zł**
Dostępność	**Dostępny**
Czas wysyłki	**24 godziny**
Kod producenta	**60SEI113**
Kod EAN	**00486558**
Kod producenta	**60SEI113**
Moc	**0.4 kW**
Typ silnika	**trójfazowy**
Rodzaj silnika	**elektryczny**
Średnica wału	**14 mm**
Obroty	**3000 RPM**
EAN (GTIN)	**00486558**
Marka	**Holry**
Model	**60SEI113-44030**

Opis produktu

Wysokiej klasy hybrydowy serwo napęd

60SEI113-44030

DC 48V 400W 1,27Nm 3000rpm

z enkoderem inkrementalnym 2500ppr

PARAMETRY:

- **sterowani step-dir (0-10V, 4-20mA)**
- **parametryzacja przez RS-485   -program i interfejs w cenie**
- moc napędu 0.4kW
- napięcie zasilania 48VDC
- prąd silnika maksymalny 11 A
- obroty znamionowe 3000RPM
- moment znamionowy 1.27Nm
- moment chwilowy 3.9Nm
- enkoder kwadraturowy 2500PPR
- IP54
- praca w klasie S1
- charakter pracy - wektorowy
- rozmiar nema24 (60X60mm)


HOLZY
CE
NAME
INTEGRATED SERVO MOTOR
MODEL
60SEI 113 48V 400W
DATE
2023.5.31

Opis wyprowadzeń

WIRING DIAGRAM

TERMINAL		NAME	FUNCTION	
CN1	1	GND	DC power ground	DC24-36V power supply, positive and negative Reverse connection will damage the drive.
	2	DC+	DC power positive	
CN5	1	D01+	Output Terminal 01	The terminal function depends on the user's I/O function setting
	2	D01-		
	3	D02+	Output Terminal 02	
	4	D02-		
	8	DI1	Input Terminal 01	
	5	DI2	Input Terminal02	
	6	DI3	Input Terminal03	
	7	DIC	The common end of the input terminal is used to drive the input optocoupler, connected toDC12~24V (common positive NPN connection) or OV (common negative PNP connection) Current ≥ 100mA	
	9	DIR+	Direction Positive	DC5-24V Auto Adapt
	10	DIR-	Direction Negative	
	11	PULS+	Pulse Positive	
	12	PULS-	Pulse Negative	


TERMINAL		NAME	FUNCTION
CN6	1	485A/T	485 Communication Positive
	2	NC	Reserve
	3	485B/T	485 Communication Negative
	4	NC	Reserve
	5	GND	Communication Public ground
	6	NC	Reserve
CN7	1	485A/T	485 Communication Positive
	2	SWCLK/T	Program upgrade clock line
	3	485B/T	485 Communication Negative
	4	SWDIO/T	Program upgrade data cable
	5	GND	Communication Public ground
	6	+3.3V	Communication 3.3V Power

Porównanie parametrów serwo napędu zintegrowanego 200W i 400W

MODEL	60SEI95-22030	60SEI113-44030
Rated Voltage(V)	24	48
Rated Power(W)	200	400
Rated Current(A)	12	11
Rated Torque(N.m)	0.64	1.27
Maximum Torque(N.m)	1.27	3.82
Rated Speed(rpm)	3000	3000
MAX Speed(rpm)	3200	3200
Resistance(Ω)	0.12	0.27
Inductance(mH)	0.36	0.56
Torque Constant N-m/A	0.06	0.12
Body Length (L) mm	95	113
Number of Poles	5	
IP Rating	IP54	
Insulation Class	Class F	



Wymiary serwo napędu

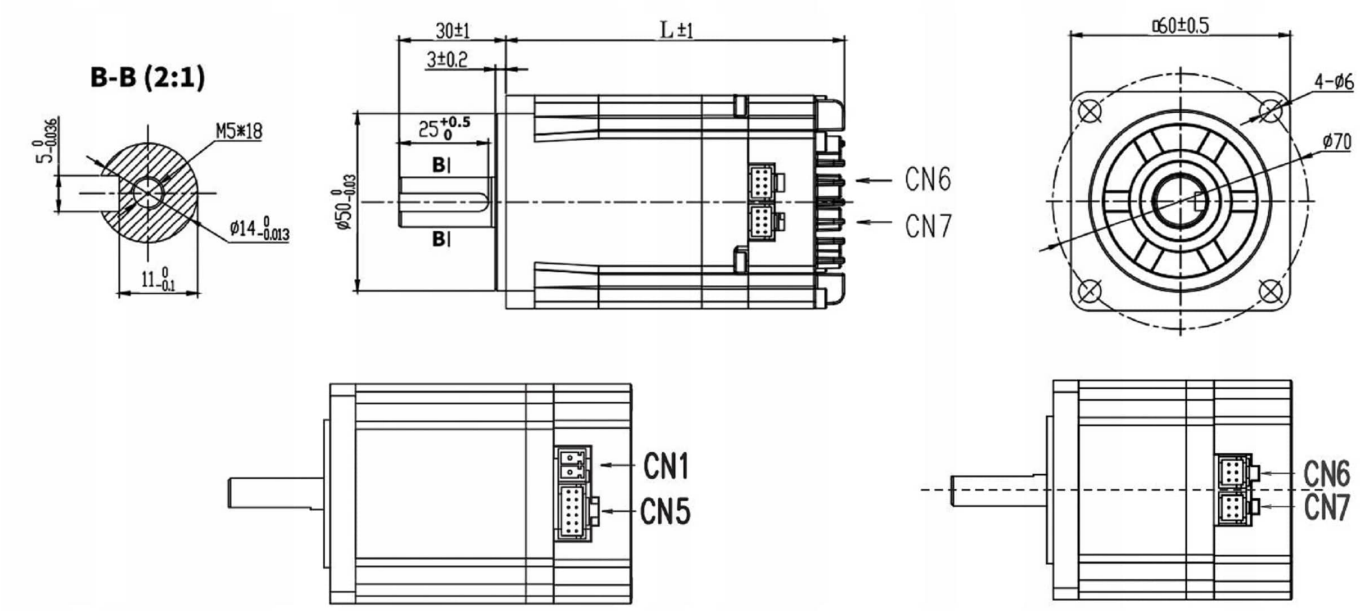

Przewód sygnałowy i do podłączenia do PC RS-485

